

Embedded Solutions



USB Flash Modules

UFM510V USB Flash Module (Vertical)

Transcend's USB Flash modules are convenient, easy-to-implement solutions for expanding the memory capacity of industrial computers. These compact storage devices consume a minimal amount of power. Due to their minimalist dimensions, these USB modules are suitable for use in small embedded systems.

Hardware Features

- Compliant with RoHS 2.0 standards
- MLC NAND flash
- Low power consumption

Firmware Features

- Built-in BCH ECC (Error Correction Code) functionality
- Advanced Global Wear-Leveling and Block management for reliability
- Advanced Garbage Collection


Ordering Information

8GB	TS8GUFM510V
16GB	TS16GUFM510V
32GB	TS32GUFM510V

Specifications

Appearance	Dimensions	30.2 mm x 22 mm x 6 mm (1.19" x 0.87" x 0.24")
	Weight	3 g (0.106 oz)
	Pin Count	10 pin
	Pitch	2.54mm (normal type)
Interface	Connection Interface	USB 2.0
Storage	Flash Type	MLC NAND flash
	Capacity	8 GB / 16 GB / 32 GB
Operating Environment	Operating Voltage	5V±10%
	Operating Temperature	0°C (32°F) ~ 70°C (158°F)
	Storage Temperature	-40°C (-40°F) ~ 85°C (185°F)
	Humidity	5% ~ 95%
	Shock	1500 G, 0.5 ms, 3 axis
	Vibration (Operating)	20 G (peak-to-peak), 7 Hz ~ 2000 Hz (frequency)
	Note	Default operating voltage: 5V±10% ; 3.3V±10% by request.
Power	Power Consumption (Operation)	0.58 watt(s)
Performance	Read Speed (Max.)	up to 42 MB/s
	Write Speed (Max.)	up to 21 MB/s
	Terabytes Written (TBW)	up to 56 TBW
	Mean Time Between Failures (MTBF)	3,000,000 hour(s)
	Note	Speed may vary due to host hardware, software, usage, and storage capacity. Terabytes Written (TBW) expresses the endurance under the highest capacity.
Warranty	Certificate	CE / FCC / BSMI / UKCA
	Warranty	Three-year Limited Warranty
	Warranty Policy	Please click here for more information about the Transcend Warranty Policy. Due to the complexity and variety of industrial applications, Transcend cannot guarantee 100% compatibility with all platforms and under all scenarios. For special applications and environments, it is strongly suggested that you contact Transcend beforehand for clarification.

Mechanical Dimensions

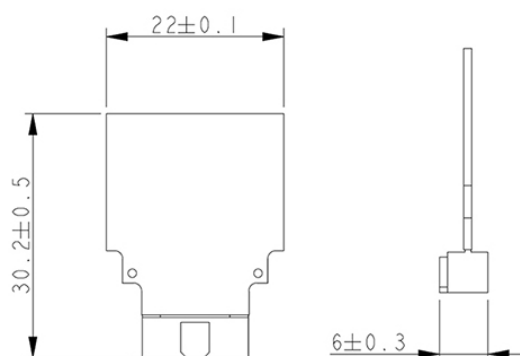

Product specifications are subject to change without notice. Pictures shown may differ from actual products. Total accessible capacity varies depending on operating environment. Due to the complexity and variety of industrial applications, Transcend cannot guarantee 100% compatibility with all platforms and under all scenarios. For special applications and environments, it is strongly suggested that you contact Transcend beforehand for clarification.